

MetroCount®

TRAFFIC COUNTERS YOU CAN COUNT ON



AUTOMATIC TRAFFIC COUNTERS



REAL-TIME DATA ANALYSIS

VEHICLE TRAFFIC COUNTERS AND CLASSIFIERS



RoadPod® VT

Portable traffic counter with two rubber hoses for short-term road traffic surveys.



RoadPod® VT4

Portable traffic counter with four rubber hoses, enabling comprehensive data collection from highways and other multi-lane roadways.



RoadPod® PhaseT

This counter is attached to traffic lights or rail crossings, using rubber hoses and an optical fibre connection to gather traffic data in relation to signal phases.



RoadPod® VP

Permanent vehicle counter with piezoelectric sensors. Ideal for major roads with heavy flows to provide continuous, lane by lane, seasonal data.



RoadPod® VL

Permanent vehicle counter using inductive loops for recording class, speed and volume data (model VL5810) or just traffic volumes (model VL5805).



RoadPod® VM

Tiny, unobtrusive and off-grid vehicle counters that can be permanently installed in a minute, and provide real-time speed, gap & length traffic data through ATLYST®.



RoadPod® VM-I


Embedded, flush, off-grid vehicle counters that can be permanently installed. Provides real-time speed, gap & length traffic data through ATLYST®.

ACTIVE TRANSPORT COUNTERS AND CLASSIFIERS



RidePod® BP

Permanent counter gathering data on bikes, scooters & pedestrians with embedded piezoelectric sensors. Can be paired with RidePod® QR bike data display.



RidePod® QR

A custom-designed sign positioned beside a path or cycleway, featuring a scannable QR code that enables the public to explore local cycling data.



RidePod® BT

Portable bike counter with rubber hoses for short-term bicycle & scooter surveys.

A large number of MetroCount Vehicle Classifier System units are stacked in the back of a van. The units are arranged in a grid-like pattern, filling most of the cargo space. The van's interior, including the seats and dashboard, is visible in the background. The units are light grey with blue labels that read "MetroCount® Vehicle Classifier System".

**MOST ACCURATE AND RELIABLE
TRAFFIC COUNTERS**

MetroCount®
Vehicle Classifier System

CE

www.metrocount.com

MetroCount®
Vehicle Classifier System

CE

www.metrocount.com

RoadPod® VT

PORTABLE VEHICLE COUNTER & CLASSIFIER

VOLUME | SPEED | AXLE-BASED CLASSIFICATION | HEADWAY & TRAFFIC GAP | DIRECTION



The RoadPod® VT system is used in 135 countries. Renowned for recording up to 4 million vehicle axles with greater than 99% accuracy, it is the best solution for short-term traffic monitoring on the market.

Economical, easy to install & replace, two pneumatic hoses record traffic under a broad range of conditions. The counter has an expected lifespan of 10+ years.


Sensors: Two pneumatic hoses

Memory: Flash, up to 1 million vehicles

Battery life: Up to 4 years

Enclosure: Stainless steel road case

Remote Access Link: Optional

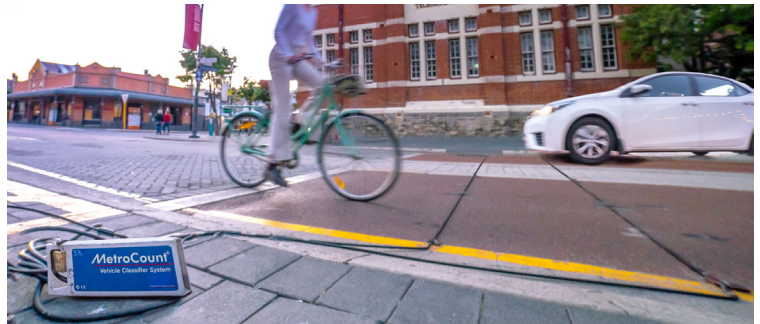

RoadPod® VT4 PORTABLE FOUR-TUBE COUNTER & CLASSIFIER

VOLUME | SPEED | AXLE-BASED CLASSIFICATION | HEADWAY & TRAFFIC GAP | DIRECTION

The RoadPod® VT4 is the solution for collecting comprehensive and accurate data from multi-lane roads, often used for monitoring highways.

With four hoses, one counter collects two datasets from two lanes, regardless of traffic direction. A combination of VT4s can simultaneously monitor up to eight traffic lanes in all weather and lighting conditions.

Sensors: Four pneumatic hoses

Memory: Flash, up to 4 million axles

Battery life: Up to 2 years

Enclosure: Stainless steel road case

Remote Access Link: Optional



RoadPod® Phase T VEHICLE BEHAVIOUR AT TRAFFIC SIGNALS

VOLUME | SPEED | AXLE-BASED CLASSIFICATION | HEADWAY & GAP | RED LIGHT VIOLATIONS



The RoadPod® PhaseT simultaneously collects traffic data (via hoses) and signal timings (via fibre optic cable) to paint a clear picture of road activity at traffic signals and rail crossings.

The PhaseT is often used to assess reaction times during the yellow warning phase, identify potential violations, or to evaluate the effectiveness of the signals. Data collected will highlight safety risks associated with red and yellow light violations and speeding.

Sensors: Two pneumatic hoses and fibre optic cable

Memory: Flash, up to 4 million axles

Battery life: Up to 2 years

Remote Access Link: Optional



RoadPod® VP

PERMANENT PIEZOELECTRIC COUNTER

VOLUME | SPEED | AXLE-BASED CLASSIFICATION | HEADWAY & TRAFFIC GAP | DIRECTION

The RoadPod® VP offers the highest level of accuracy and detail for a permanent monitoring solution. Designed for multi-lane data collection, the system uses two low profile piezoelectric strips embedded in the pavement.


The RoadPod VP is ideal for identifying seasonal trends, traffic changes over time, and determining adjustment factors for short-term traffic surveys.

Sensors: Two or four piezoelectric strips

Memory: Flash, up to 4 million axles

Enclosure: Stainless steel cabinet with solar panel

Remote Access Module: Optional

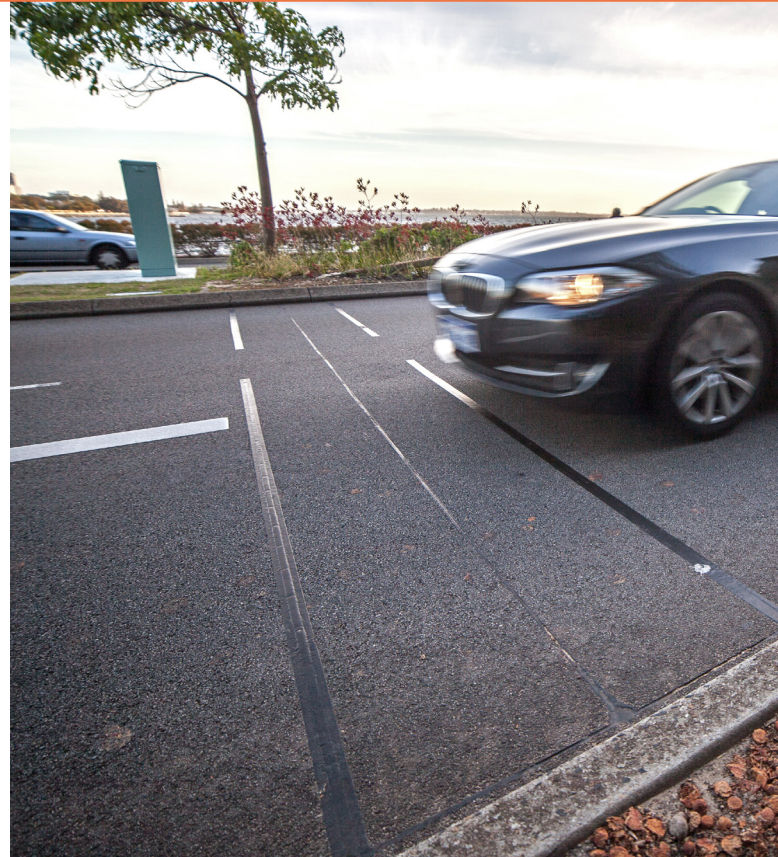

RoadPod® VL

VOLUME | SPEED | LENGTH-BASED CLASSIFICATION | HEADWAY & TRAFFIC GAP | DIRECTION

PERMANENT INDUCTIVE LOOP COUNTER



The RoadPod® VL series uses loop sensors to detect vehicles entering and leaving an inductive field. This system can be cost-effectively retrofitted to existing sensors.

The VL5810 model provides vehicle volume, class, speed, direction and other traffic-related data.

The VL5805 model is ideal when only volume data is required.

Sensors: Two or four inductive loops

Memory: Up to 500,000 classified vehicles

Enclosure: Stainless steel cabinet with solar panel

Remote Access Module: Optional



EVERY VEHICLE COUNTED FOR REAL-TIME TRAFFIC DATA



RoadPod® VM

QUICK-INSTALL TRAFFIC COUNTER

VOLUME | SPEED | LENGTH-BASED CLASSIFICATION | HEADWAY & TRAFFIC GAP | DIRECTION



The RoadPod® VM was designed to be the simplest and fastest traffic sensor to install on sealed roads, taking just a minute for sensors to be permanently installed.

The sensors work in an array to accurately count vehicles in real time, monitor speeds and classify vehicle type based on the length of each passing vehicle. Gap and headway information is also available and all data is precisely time-stamped.

Sensors: Four, 3-Axis magnetometers per lane

Memory: Unlimited (with Cloud connectivity);
250K vehicles with no connectivity

Battery life: Unlimited. 100% solar powered

Software: ATLYST® online analytics dashboard



RoadPod® VM-I

VOLUME | SPEED | LENGTH-BASED CLASSIFICATION | HEADWAY & TRAFFIC GAP | DIRECTION

The RoadPod® VM-I is a permanently embedded, solar-powered vehicle detection system, delivering year-round traffic monitoring in real-time. Its flush, in-road design ensures accurate, uninterrupted data collection, remaining protected from traffic, snow ploughs, and harsh weather conditions.

Like the patented VM, the VM-I captures time-stamped speed, vehicle class, gap, and headway data for each passing vehicle.


Sensors: Three, 3-Axis magnetometers per lane

Memory: Unlimited (with Cloud connectivity)

250K vehicles with no connectivity


Battery life: Unlimited. 100% solar powered

Software: ATLYST® online analytics dashboard

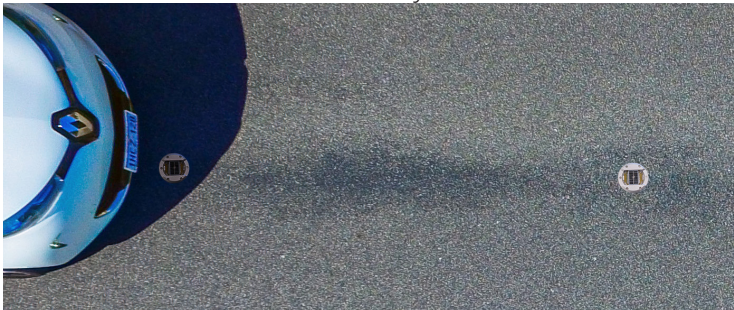

ATLYST[®]

powered by MetroCount Traffic Executive[®] software

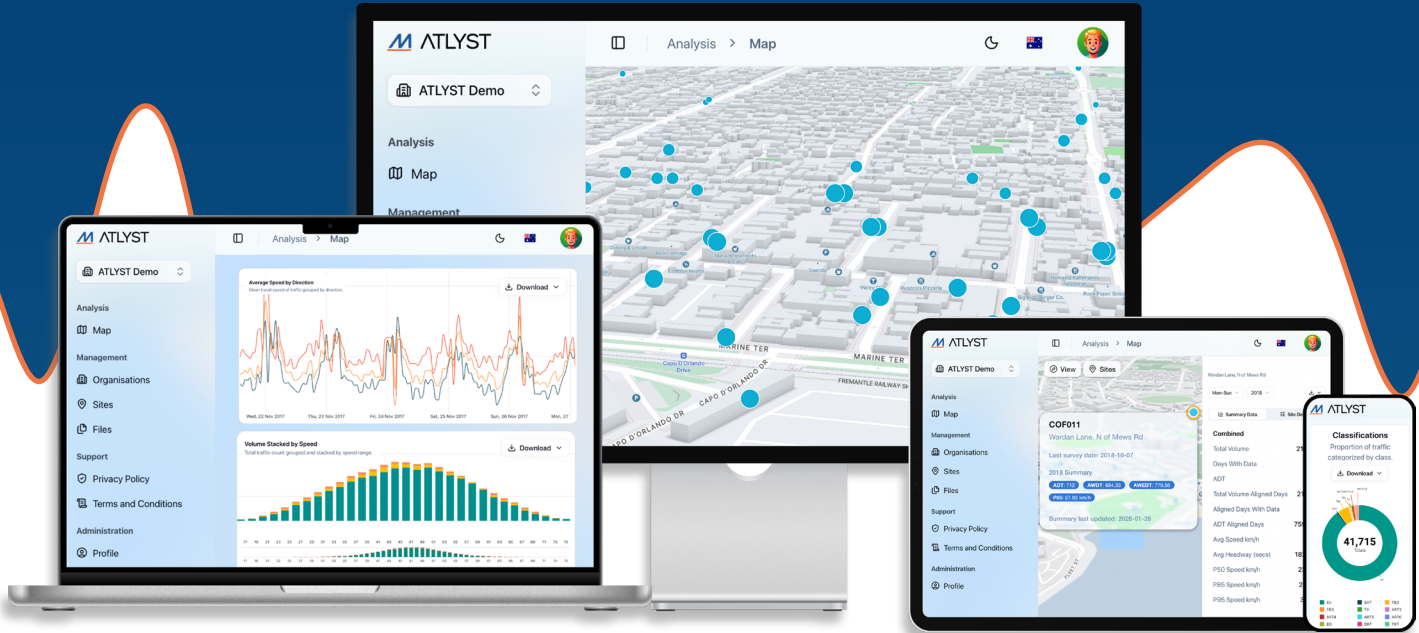

STREAMLINED TRAFFIC SURVEYS, FROM DATA TO REPORTS

www.metrocount.com | info@metrocount.com | +61 8 9430 6164

ATLYST is designed to help you efficiently manage large survey projects, and visualise data on interactive maps, while keeping you in control of your data.

SEE TRAFFIC DATA CLEARLY

Understand it quickly. Use it with confidence.

Instead of digging through reports or spreadsheets, ATLYST displays all of your data, seamlessly, all in one place.

It turns raw traffic information into something people can understand, explain with ease, and stand behind.

GENERATE PROFESSIONAL REPORTS IN JUST ONE CLICK

Create clean, presentation-ready reports without rebuilding or reformatting. ATLYST offers insightful, well-considered analysis without friction.


Built on the solid foundation of the MTE® Software, ATLYST offers a seamless and enhanced user experience.

INTUITIVE BY DESIGN

- Upload and download traffic data with ease
- Get notified when data anomalies are found
- Securely store traffic, report, and multimedia files in one central archive
- Export files in standard formats for sharing or reuse
- Access data from any device
- Retain full ownership of your information

ENGINEERED FOR USE BY:

- Planners and engineers
- Local governments and agencies
- Consultants and decision makers
- Anyone who needs to explain traffic information clearly

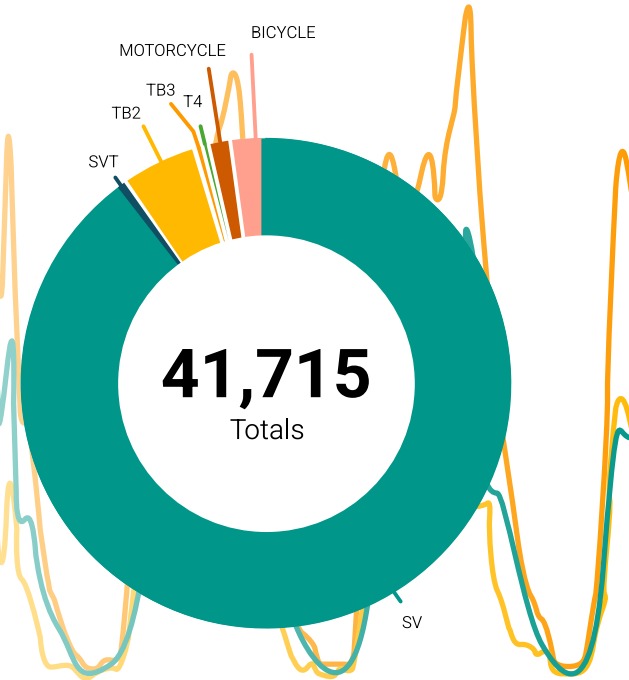

DETECTION OF EVERY ACTIVE TRANSPORT MODE



RidePod® BT

PORTABLE BICYCLE AND SCOOTER COUNTER

VOLUME | SPEED | CLASS | HEADWAY & TRAFFIC GAP | TRUE DIRECTION | BICYCLE CLUSTERS



The RidePod® BT is optimised for detecting bicycle and e-scooter axles with thin-walled pneumatic hoses for increased sensitivity.

In the MTE software included, every axle hit is used to accurately identify individual bicycles in clusters and distinguish bikes and e-scooters from all other traffic. This results in accurate volume, speed and true direction statistics.

Sensors: Two thin-walled pneumatic hoses

Memory: Flash, up to two million bicycles

Remote access: Optional



RidePod® BP

BICYCLE, SCOOTER & PEDESTRIAN COUNTER

VOLUME | SPEED | HEADWAY & GAP | TRUE DIRECTION | BIKE CLUSTERS | PEDESTRIAN VOLUMES



The RidePod® BP is the device of choice for sustainable transport planning. Using two sensitive piezoelectric strips, this system is not affected by weather, light or temperature, ensuring accurate, 24/7 data gathering.

The sensors simultaneously detect and time-stamp each bicycle or scooter axle hit, accurately classifying even when in clusters. Pedestrian volumes are reliably post-processed by the MTE software and ATLYST®.

Sensors: Two piezoelectric strips

Memory: Flash, up to 1 million bikes and e-scooters

Enclosure: Stainless steel cabinet with solar panel




RidePod® QR

VOLUME | SPEED | CLASS | HEADWAY & TRAFFIC GAP | TRUE DIRECTION | BICYCLE CLUSTERS

The RidePod® QR displays cycling data to the public via a scannable code on a customised sign at the edge of a path or bike lane.

Once scanned, an interactive map of all nearby public cycling data sites is viewable on any smart phone.

Each site can display cycling volumes, speed, direction, gap and bike or scooter types.

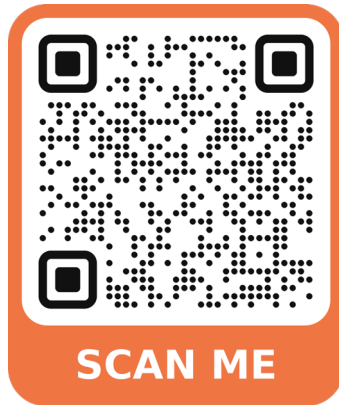

RidePod QR is powered by ATLYST®, with data refreshed every 15 minutes, giving the public an up-to-date view of cycling movements in their city.



MetroCount[®]

info@metrocount.com

Australia & Oceania: +61 8 9430 6164

UK & Africa: +44 20 8782 8999

Americas: +1 301 497 6101

Europe: +31 10 268 01 84

